


# PE/PF60

## Satellite antenna

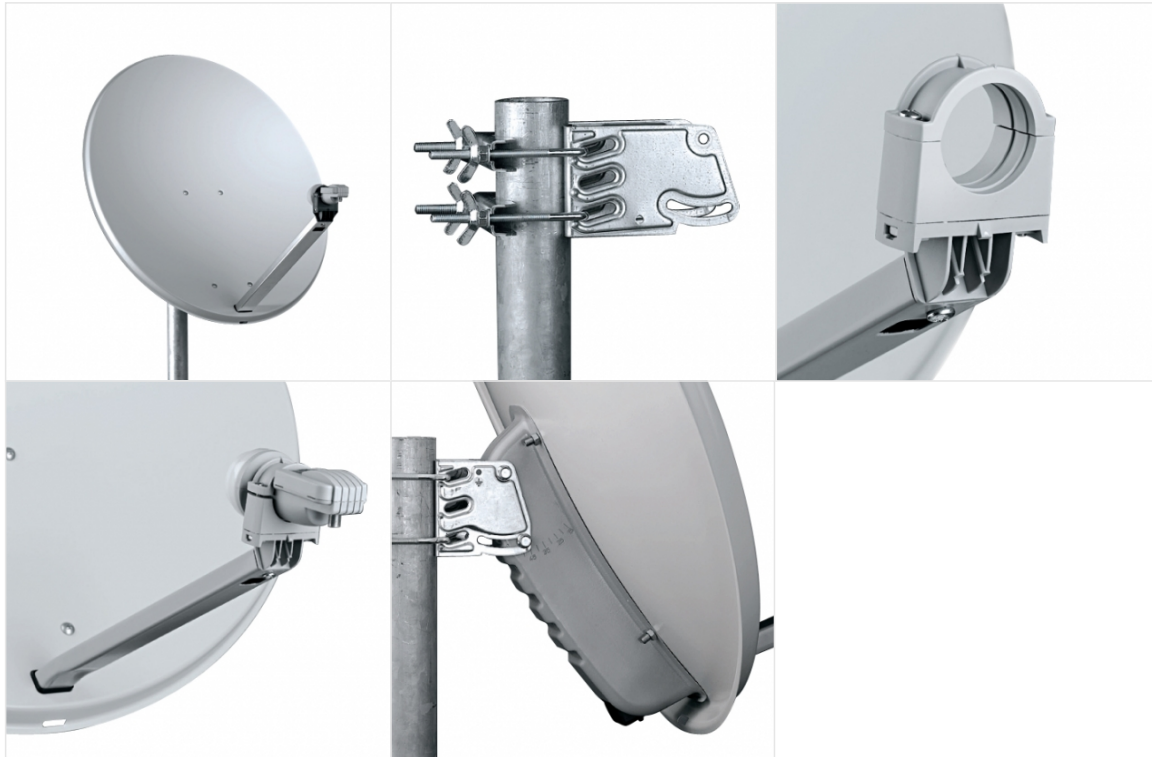

### TECHNICAL DATA

**Dish dimensions (external) (mm)**

644x574

**Gain at 10,75 GHz (dB)**

34,7

**Gain at 11,75 GHz (dB)**

35,2

**Gain at 12,75 GHz (dB)**

36,1

**Half power beamwidth at 12,75 GHz (deg)**

< 3,1°

**Cross polar discrimination on main axis (dB)**

> 27

**Mast clamp for (mm)**

32 - 60

**Elevation range (deg)**

15° - 48°

**Elevation with passing pole (deg)**

45°

**F/D ratio**

0,6

**Offset angle (deg)**

25°

**Windloading at 72 Km/h (Kg)**

**10**

**Windloading at 144 Km/h (Kg)**

**41**

**Windloading at 216 Km/h (Kg)**

**92**

**Feed bracket diameter (mm)**

**23 / 40**

**Available reflector materials**

**steel/aluminium**

**Available colours**

**white/anthracite/red**

**Back mount made of**

**galvanized steel + plastic insert**

**AZ/EL holder made of**

**galvanized steel**

**LNB Arm (35x20mm) made of  
aluminium:**

**LNB holder made of**

**plastic**